



Cranab FC45



Cranab FC45

The forestry crane that gives the best to the best. The Cranab FC45 has been developed for users who know that quality always pays in the end.

Providing the optimum alternative to smaller forwarders and agricultural tractors, where the crane makes the difference - without shortcuts or compromises!

The Cranab FC45 and its attractive design solutions are inspired by our larger forwarding

cranes. It is therefore also based on the professional demands the forest imposes, with quality down to the finest detail. Parking positions, hosing, hydraulics and high-quality materials provide the perfect complement!

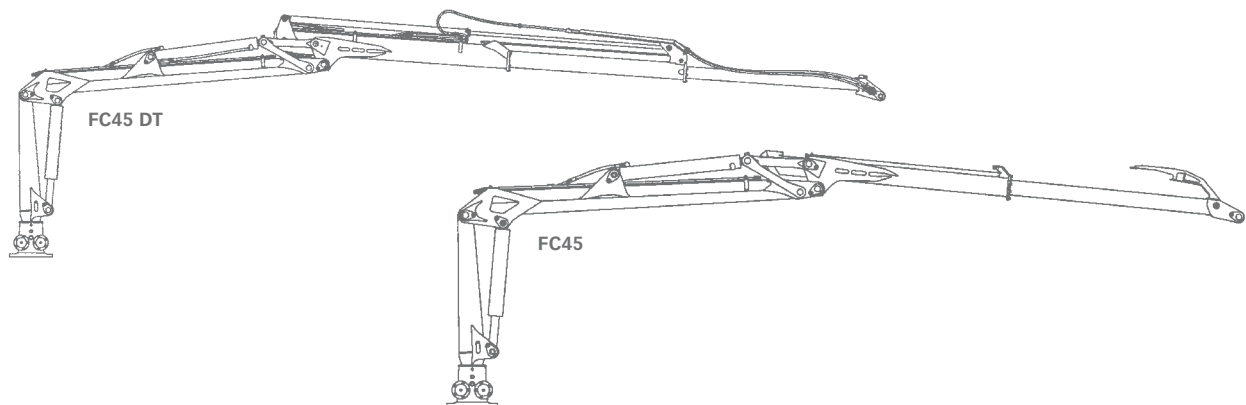
The Cranab FC45 is available in two versions, with either a single or double telescopic outer boom. The latter offers excellent reach, for thinning. The linking outer boom ensures a wide field of movement,



with equal power throughout the entire area.

The construction is robust yet light, and is suited to many different kinds of application.

The slewing assembly naturally has double slewing cylinders for extra power.

As always, Cranab's well-routed hosing provides superior operating reliability and smoothness. Various valve options can be supplied, mounted in a practical way directly on the foot of the crane.



Range of movement.	Technical data Tele:	Technical data Double Telescopic:
 <p>White area: the crane's range of movement.</p>	Max. reach 6.1 m Lifting force at tip of boom: at reach 3.0 m 1120 kg 4.6 m 765 kg 6.1 m 570 kg	Max. reach 8.0 m Lifting force at tip of boom: at reach 3.0 m 990 kg 4.8 m 650 kg 8.0 m 355 kg
	Size  <p>Suitable for large agricultural tractors/small forwarders</p>	Slewing torque, gross 13.5 kNm Lifting torque, gross 45.6 kNm Slewing angle 380° Boom extension 1.55 m Working pressure 19 MPa Recommended oil flow 40-80 l/min Weight without unit, rotator and oil 650 kg

Right to alteration reserved. The pictures do not always show cranes in standard version.



Cranab AB
 922 82 VINDELN, SWEDEN
 Tel +46 933-135 00, Fax +46 933-617 36, Mail: info@cranab.se, www.cranab.com

